MX6022A-ME8

Outdoor WiFi6 High Performance Wireless Access Point

Features

- Support IEEE 802.11g/n/ac/ax standard - Maximum transfer rate 573.5Mbps (2.4G) & 1200Mbps (5.8G)
- Support wireless bridge and routing modes, which can flexibly deploy the network by adjusting the device network mode
- Support intelligent QoS function, realize voice, video, and text's priority transmission through powerful text recognition, priority setting, and priority scheduling functions to meet various business needs
- The system supports dual firmware switching between master and backup
- version, automatic synchronization backup of both parts, automatic detect & switch system failures function to enhance equipment stability and realizing automatic recovery from system failures - Support web management, making equipment installation and
- maintenance more convenient - Support wireless controller (AC) management, realize remote centralized configuration and upgrade management
- Support 802.3af Protocol (POE) - Support ceiling-mounted and pole-mounted installation, suitable
- for installation in different area - The IP68 waterproof level ensure it can be suitable for a variety
- of environments
- **Description**

MX6022A-ME8 Outdoor WiFi6 High Performance Wireless Access Point supports the IEEE 802.11g/n/ac/ax protocol with a maximum rate of 1773.5Mbps, optimized bandwidth and network speed. Able to support

multiple working modes of AP/Client to meet different application requirements. It can be flexibly applied to different network access plans and supports wireless positioning functions to meet the requirements of underground pipelines, factories, industrial parks and related areas for smart wireless

make sure stable, reliable coverage and high-throughput performance in all scenes.

coverage. It supports seamless roaming technology with automatic detection and seamless switching to ensure users can enjoy the feelingless roaming under the signal coverage. It can provide customers with a stable full-area outdoor wireless signal and ensure the good experience of stable, high-quality and convenient network services. It also incorporates several leading core achievements to

Its structural design fully considers the applications in extreme industrial environments and is designed to meet the IP68 waterproof standard, making it an ideal choice for industrial-grade Wi-Fi coverage equipment. Nanjing MAXON O.E. TECH. CO., LTD **MAXON**

TEL: 86-25-86380932 WEB: www.mxcomm.cn Link Of Your Think

E-MAIL: info@maxonc.com Nanjing MAXON O.E. TECH. CO., LTD

MAXON

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

Positioning service 24dBm high power Support wireless probe function, The highest output power can reach



dual-band 12dBi antenna brings excellent Wi-Fi signal transmission


Multiple installation design

Flexible mounting design supports

both ceiling and pole mounts

2x2 MIMO

Supports 2x2 MIMO standard

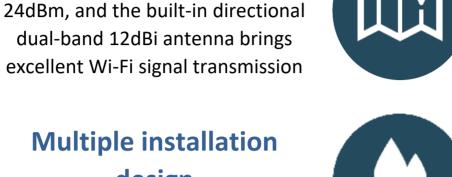

can meet the positioning requirements

docking with positioning server, which

of smart underground pipeline and factory **Protection Class IP68**

Protection Class reaches to IP68,

suitable for a variety of environments

High throughput

Maximum transfer rate 1773.5Mbps



2.5G Ethernet Port


Supports 2.5G Ethernet Port



POE powered Supports 100-meter Ethernet POE

power supply, which is convenient for


deployment and networking



Shell

Host size

Net weight



1650g

HARDWARE	Installation	ceiling(standard), pole-mounted (optional)
	Protection class	IP68
	Antenna Gain	8dBi
	Antenna type	built-in dual-frequency directional antenna
	Power supply mode	48V 1.25A POE
MAXON		Nanjing MAXON O.E. TECH. CO., LTD
		TEL: 86-25-86380932
Link Of Your Think		WEB: www.mxcomm.cn
		E-MAIL: info@maxonc.com
	N	anjing MAXON O.E. TECH. CO., LTD

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

-40°C ~70°C /-40~158°F

Maximum power consumption ≤30W Maximum transmit power 24dBm Connector (WAN) 10/100/1000Mbps/2.5Gbps

Working temperature

HARDWARE	Storage temperature	-40°C~85°C/-40~185°F
	Working humidity	5%~95%RH non-condensing
	Surge immunity	POE/GE: common mode 4KV, differential mode 2KV
	Electrostatic discharge immunity	Contact discharge: 6KV, Air discharge: 8KV
	Mounting kit	2 x RJ45 M22 PG waterproof connector (optional SFP waterproof connector) 1 x Mounting Kit 1 x 48V 1.25A POE Adapter 1 x AC Power Cord 1 x Product Instruction Manual 1 x Product Certificate & Warranty Card
SOFTWARE	Protocol	802.11g/n/ac/ax
	Maximum speed	1773.5Mbps
	Frequency range	2.4G: 2412~2472MHz 5.8G: 5180~5320MHz, 5745~5825MHz
	Channel width	20/40/80MHz
	Working Mode	WDS Access Point, WDS Client
	Security configuration	WPA2-PSK, WPA3-SAE
	Application Mode	WDS Access Point, WDS Client
	Configuration management	support web configuration, support AC remote management, support SNMP management
	Ethernet software features	support IPv4/IPv6 dual protocol stack DNS, HTTP, IPv4, LLDP, Proxy ARP, SMTP, SNMP v2c/v3, Syslog, TCP/IP, SSH, UDP, VLAN
		Naniing MAYON O E TECH CO LTD
MAXON		Nanjing MAXON O.E. TECH. CO., LTD TEL: 86-25-86380932
Link Of Your Think		WEB: www.mxcomm.cn E-MAIL: info@maxonc.com
	N	anjing MAXON O.E. TECH. CO., LTD
Add:		Creative Park, Zidong Road, Qixia District, Nanjing, China
		support intelligent channel analysis & automatic

other industries

SOFTWARE

APPLICATION

Dynamic frequency selection

Intelligent Bandwidth Rate Limiting

IoT expansion

Others

Operator Main Wireless Network Construction

Scheduled restart, QoS, Watchdog Wireless video surveillance (traffic, urban, public security, oil and gas pipelines, forest fire prevention and security, residential and other key areas monitoring) Wireless video/data transmission and wireless coverage in railway, transportation, power and

Support IP and MAC-based upstream and downstream

reserved UART interface to support IoT application

expansion such as Bluetooth, ZigBee, UWB, etc.

Wireless network coverage of rural informatization construction 262mm 72mm **Dimensions** 194mm MAXON **Connector**

optimal channel selection

support 5.8GHz DFS

rate limiting



Nanjing MAXON O.E. TECH. CO., LTD

indicators


restart

TEL: 86-25-86380932


WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com

Nanjing MAXON O.E. TECH. CO., LTD

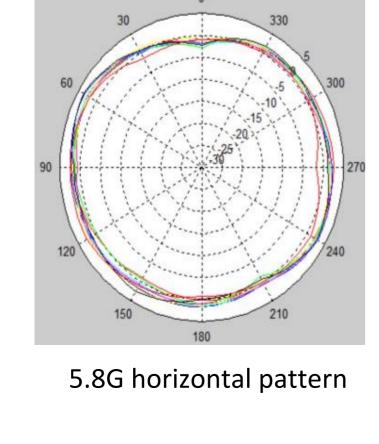

2.4G horizontal pattern

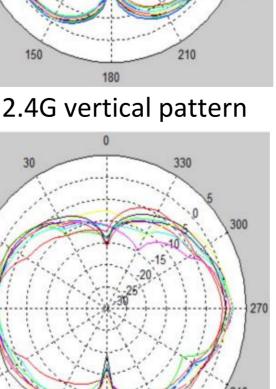

5.8G vertical pattern

